

Temperature sensor for compost

T0-1




This sensor helps you to measure the temperature of surface and center of compost. There are 10cm of divisions on sensor holder, you will know the depth of sensor at a glance. The temperature sensor is capable to memorize the data. The data can be transferred to computers, using attached software.

Contents:

- 1) Sensor holder
- 2) Temperature sensor (2 channels) with software & battery
- 3) Sensor probe (for surface temperature)

Stopper for decision of depth (Option)

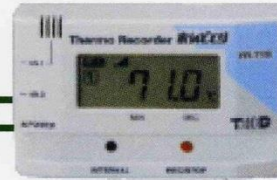

Temperature sensor

Channel : 2 channels
Range : -60~110C
Memory : 800data
Battery : A3 2pcs


Sensor probe

for temperature of surface of compost

Sensor holder

Length : Approx: 1m
Divisions : 1-cm
Material : Stainless steel

Position of sensor for central part

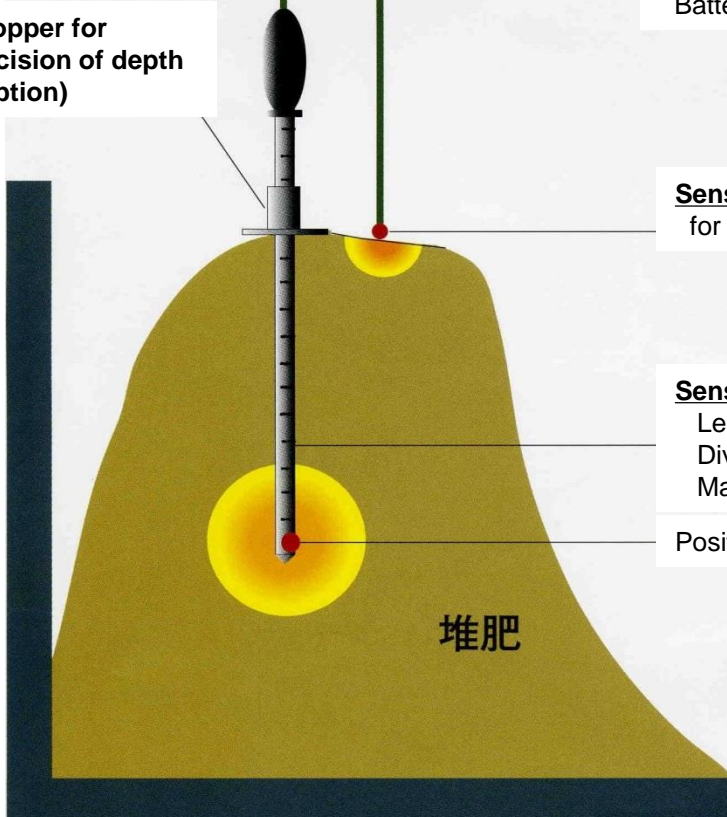

富士平工業株式会社

〒113-0033 東京都文京区本郷6丁目11番6号
電話 東京(03)3812-2271 ファクシミリ(03)3812-3663

FHK

北海道富士平工業株式会社

本社 : 〒001-0027 札幌市北区北27条西9丁目5番22号
電話(011)726-6576(代表) ファクシミリ(011)717-4406

支店 : 〒080-0802 帯広市東2条南3丁目7 十勝館ビル
電話(0155)22-5322(代表) ファクシミリ(0155)22-5339

Specifications are subject to change without prior notice

FHK FUJIHIRA INDUSTRY CO., LTD.

6-11-6 Hongo, Bunkyo-ku, Tokyo 113-0033, Japan

Tel: +81-3-3812-2270 Fax: +81-3-3812-3663

E-mail : overseas@fujihira.co.jp